

Features

- 2-wire system
- 24VDC power system
- Strong resistance to surge
- 7.4mm Ultra-thin design
- Support terminal grounding (optional)
- 35 mm rail mounted

Discription

This SPD limits induced transients of different origin (lightning stroke, switching impulse, etc.). This is achieved by diverting the transient current to ground and limiting the signal line voltage to a safe level for the duration of the surge.


It can be applied to 24V DC power system.

Parameter


Nominal voltage Un	24 V
Max. continuous operating voltage Uc(DC)	48 V
Max. continuous operating voltage Uc(AC)	32 V
Nominal current IL	10 A
Total lightning impulse current Iimp(10/350 μs),D1	5 kA
Lightning impulse current Iimp(10/350 μs),D1	2.5 kA
Max. discharge current Imax(8/20 μs),C2	20 kA
Nominal discharge current In(8/20 μs),C2	10 kA
Voltage protection level Up(8/20 μs) , C2	L-L≤60 V/ L-PE≤600 V
Voltage protection level Up(1 kV/μs) , C3	L-L≤45 V/ L-PE≤600 V
Bandwidth fG(100 Ω resistance)	10 MHz
Response time Ta	<1 ns
General parameters	
Operating temperature	-40 °C ~ +80 °C
Installtion	35 mm DIN rail
Grounding mode	Rail/ terminal (optional)
Connecting wire size	0.2 mm ² ~ 2.5 mm ²
Material	PC
Flame retardant grade(UL94)	V0
Protection degree	IP20
Standards	IEC 61643-21/ GB/T 18802.21

Graphics

Schematic



Dimensions

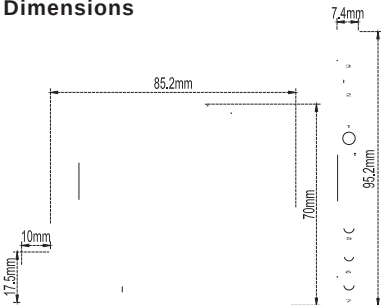

Application

