


EN 50164-1 IEC 62305 IEC 60364-5-53
IEC 61643-1/GB 18802.1 GB 50057 GB 50343

P IEC

P

T2 40kA







2P TNS
3P TNC IT
P+N TT
3P+N TNS TT

24/20 24VDC/20kA
1200/40 1200VDC/40kA
385/40 385VAC/40kA
255/40 255VAC/40kA
385/60 385VAC/60kA
255/60 255VAC/60kA
385/100 385VAC/100kA
260/100 260VAC/100kA
260/25 260VAC/25kA

FL
P P SPD

P

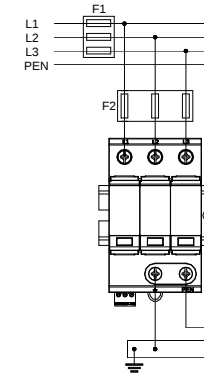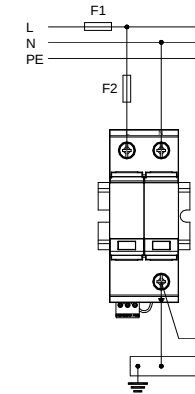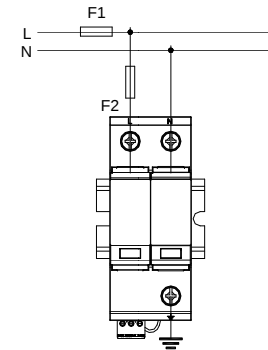

35mm

Un AC	230/400Vac			
Uc AC	385Vac	385Vac	L-N	255Vac N-PE
$I_n(8/20 \text{ s,C2})$	20kA			
$I_{max}(8/20 \text{ s,C2})$	40 kA			
$U_p(8/20 \text{ s,C2})$	$\leq 1.8\text{kV}$	$\leq 1.8\text{kV}$	L-N	$\leq 1.5\text{kV}$ N-PE
$U_p @5\text{kA}$	$\leq 1.3\text{kV}$			
	$\leq 125\text{A gL/gG}$			
	25kArms			
	$\geq 1.5\text{mm}^2$			
	$\leq 25\text{mm}^2$			
T_a	$\leq 25 \text{ ns}$			
/	/			
	-40 +80			
	35mm DIN			
	IP 20			
	UL94 V-0			

Nanjing New Power Electric Co., Ltd.

P

G