


NPFC-H1D NPFC-H11D

3 3 N
4~20mA

NAMUR

1

PC

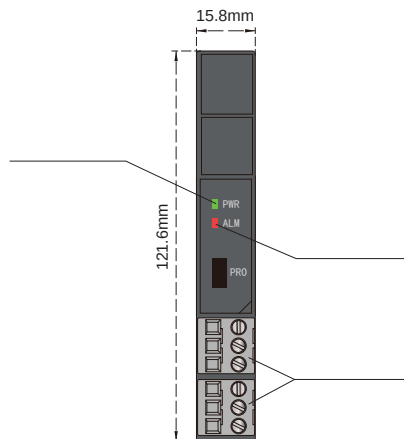

Technical Specifications

18V DC 32V DC
 0.8W 24V
 1.8W 24V
 3 3 N 30V
 2V
 0.1Hz~100kHz
 12V或24V
 ≤ 20mA
 0.1Hz~10kHz
 NAMUR 8.2V
 8mA
 0.1Hz~10kHz
 0/4 20mA 0 10mA
 0/1 5V 0 10V
 1 3 5 P
 0/4 20mA $R_L \leq 500\Omega$ 0 10mA $R_L \leq 1k\Omega$
 0/1 5V $R_L \geq 1M\Omega$ 0 10V $R_L \geq 2M\Omega$
 1 3 5 P = 0.5A/35V DC
 ± 0.1%F.S.
 ± 0.01%F.S./
 ≤ 500ms
 0 ~ 9999s E, 1 3 5 h h V i i
 i 3 5 p k u a h h j, 1 3
 h j h t 3 3 5 f i i, 3 3 5
 0 ~ 9999s
 IEC 61326-3-1
 ≥ 1500V AC /
 ≥ 500V AC /
 ≥ 100MΩ / /
 -20 +60
 -40 +80
 15.8mm× 121.6mm× 104.8mm
 LED LED
 0~22mA

Pin Configuration

3 N	3	3	3	3
NPFC-H	□	□	□	□
1	1	2	3	4~20mA
2	2	3	4	1~5V
3	3	4	5	0~10mA
4	4	5	6	0~5V
5	5	6	A	0~10V
6	6	A		0~20mA
				1 3 5 %
				4~20mA
				1~5V
				0~10mA
				0~5V
				0~10V
				0~20mA
				1 3 5 P
3 3 5 A	D			24V DC

