

IEC 61508

→ 简介

NPFSR-K51D.CZ

DO

250V AC

IEC 61508

SIL2,

SIL3 SC3

SIS ESD



Proof Test



Fail-safe



→ 技术参数

电源参数

18 V ~ 32 V DC

24 V DC

≤ 1.4 W/24 V DC

输入参数

≤ 55 mA/24 V DC

≤ 4 ms

≥ 100 ms

≤ 15 Ω

DO

输出参数

1NC + 1NO

AgSnO₂

5 A/250 V AC 5 A/24 V DC

(13, 14) 5 A

时间参数

≤ 50 ms

≤ 50 ms

≤ 10 Hz

环境参数

IEC 61298-3 IEC 61000-6-2

IEC 61326-3-1

250 V AC

6000 V (1.2/50μs) (/)

3000 V AC, 1 min (/)

IEC 60664-1

NPFSR-K51D.CZ

DO




B



→ 补充说明



C

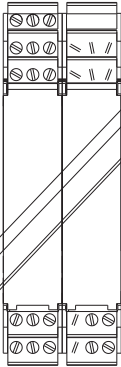

→ 面板显示

○ OUT: ()

○ TST: ()

→ 注意事项

○ IP20 ()

○ IEC 60664-1 2

○ IEC 61000-4