


C



→

( )

→

: [Ex ia Ga] IIC [Ex ia Da] IIIC

: 12 V DC ~ 30 V DC

(1 2 3):

Pt100 Cu100 Cu50 BA1 BA2

Pt1000

(5 6): 4 mA ~ 20 mA

:  $R_t \leq [(U-12)/0.022] \Omega$  U

(25 °C ± 2 °C ):

: ≤ 0.5 s

: 30 ppm/°C

允

: ≤ 20 Ω/

: EMC IEC 61326-3-1

( 1mA 1 ):

≥ 3000 V AC ( / )

: ≥ 100 MΩ ( / )

:

U<sub>m</sub>: 250V

1 2 3

U<sub>o</sub>: 6.2V I<sub>o</sub>: 22mA P<sub>o</sub>: 35mW

IIC C<sub>o</sub>: 30μF L<sub>o</sub>: 40mH

IIIC(IIIB) C<sub>o</sub>: 780μF L<sub>o</sub>: 120mH

:

-20 °C ~ +60 °C

10 %RH ~ 90 %RH (40 °C)


80 kPa ~ 106 kPa

-40 °C ~ +80 °C

	4mA~20mA
NPEXA-C21L	■

4mA~20mA

/

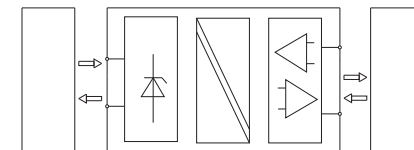

→

○

DIN IEC 60715 35mm

○

A

DIN

B

Nanjing New Power Electric Technology Co., Ltd.

